



Motorola V276 Ear Speaker Maintenance

Tools used in this guide

- [Plastic Opening Tools](#)
- [Spudger](#)
- [T6 Torx Screwdriver](#)
- [Your Hands](#)




Step 1 -

- Using the iPod opening tool, place the tool in the small crack that runs along the side of the front case to pry it off



Step 2

- Using the T6 Torx Screwdriver remove all 4 small screws.

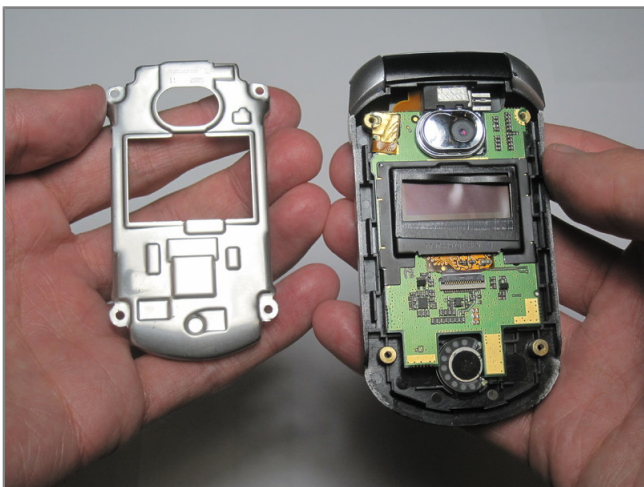

Step 3

- Remove silver plate from phone.




Step 4

- Using the spudger, remove the plastic camera casing



Step 5

- Pull back the logic board

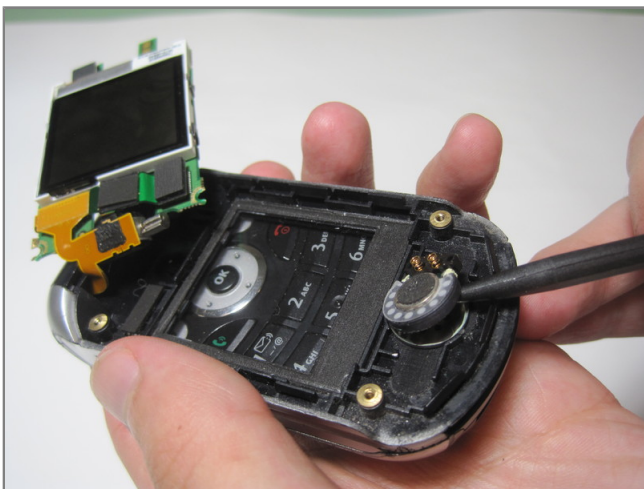

Step 6

- Underneath the logic board, use your hands or a spudger to remove the ear speaker